



Check total Start-up watts amount before plugging in any equipment.

WATTAGE ESTIMATE TABLE

| Equipment | Running Watts |
|---|---------------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| Total Running Watts (must be less than 3900 Gasoline • 3600 LPG) | |
| Largest Additional Start-up Watts | |
| Total Startup Watts needed for all loads (must be less than 5000) | |

Check total Start-up watts amount before plugging in any equipment.

To check the wattage amount:

1. Add up the Running Watts for all items you would like to use at any given time.
2. Make sure that this total is under the 3600 (LPG) or 3900 (gasoline) rated wattage of the generator.
3. Find the single highest starting watts for the selected items and add to the total.
4. Make sure that this total is under the 5000 maximum rated wattage of the generator.
5. Plug in and turn on products from largest wattage to smallest.


Typical Product Watts

Check your appliance for actual ratings.

| EMERGENCY | | | JOB SITE | | | RECREATION | | |
|------------------------|---------------|---------------------------|--|---------------|---------------------------|------------------------------|---------------|---------------------------|
| DEVICE | RUNNING WATTS | ADDITIONAL START-UP WATTS | DEVICE | RUNNING WATTS | ADDITIONAL START-UP WATTS | DEVICE | RUNNING WATTS | ADDITIONAL START-UP WATTS |
| Refrigerator / Freezer | 700 | 1500 | Air Compressor - 1/2 HP | 1000 | 1000 | AM/FM Radio | 100 | 0 |
| Radio | 100 | 0 | Table Saw - 10" | 1700 | 1300 | Electric Grill | 1700 | 0 |
| HOUSEHOLD | | | Belt Sander - 3" | 1200 | 1200 | Inflator Pump | 50 | 100 |
| DEVICE | RUNNING WATTS | ADDITIONAL START-UP WATTS | Hand Drill - 1/2" | 600 | 600 | CD/DVD Player | 100 | 0 |
| Computer w/ Monitor | 800 | 0 | Halogen Work Light | 1000 | 0 | Box Fan - 20" | 200 | 200 |
| Electric Clothes Dryer | 5500 | 500 | Reciprocating Saw | 900 | 900 | Coffee Maker | 600 | 0 |
| Electric Range | 2100 | 0 | LAWN & GARDEN | | | HEATING & COOLING | | |
| Electric Water Heater | 2000 | 0 | DEVICE | RUNNING WATTS | ADDITIONAL START-UP WATTS | DEVICE | RUNNING WATTS | ADDITIONAL START-UP WATTS |
| Light Bulb - 100 Watts | 100 | 0 | Hedge Trimmer | 400 | 400 | Central AC - 10,000 BTU | 1500 | 3000 |
| Microwave - 1000 Watts | 1000 | 200 | Pressure Washer | 1200 | 1200 | Furnace Fan - 1/2 HP | 900 | 1400 |
| Sump Pump - 1/2 HP | 1000 | 1100 | Lawn Mower | 1200 | 1200 | Space Heater | 1800 | 0 |
| Television - 27" | 400 | 0 | Edger | 1000 | 1000 | Window AC - 10,000 BTU | 1200 | 600 |
| Washing Machine | 1100 | 1100 | Note: Wattage listed are estimates for that type of equipment only. Check nameplate wattages on all loads before connecting to generator. | | | | | |
| Well Pump - 1/2 HP | 1000 | 1000 | | | | | | |

IF ANY CIRCUIT BREAKERS TRIP:

1. Make sure that **ALL circuit breakers** are reset before starting the generator again.
2. Adjust the plugs so the loads are shared across outlet circuits.

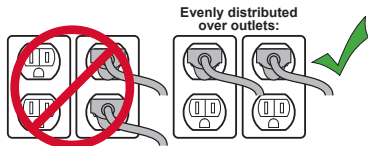


PREDATOR[®]

QUICK START GUIDE

3600 / 3900 **5000** **70143**
RUNNING WATTS LIQUIDPROpane RUNNING WATTS GASOLINE MAX STARTING WATTS

Generator Components

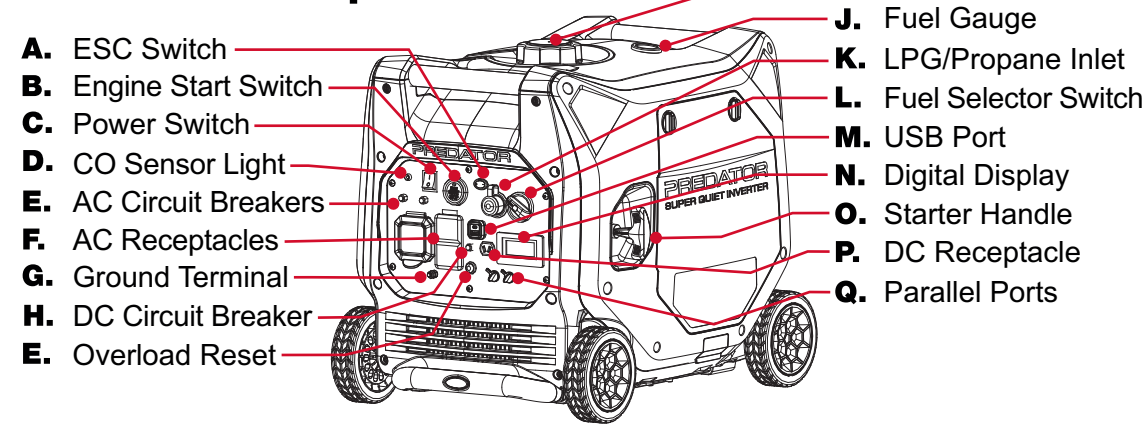

⚠ WARNING
 To prevent serious injury:
READ MANUAL BEFORE USE.



BEFORE USING:


Position generator outside and unplug all electrical loads

DANGER

Using a generator indoors CAN KILL YOU IN MINUTES. Generator exhaust contains carbon monoxide. This is a poison you cannot see or smell.



NEVER use inside a home or garage, EVEN IF doors and windows are open.









Only use OUTSIDE and far away from windows, doors, and vents.

DANGER

Do not use in trailers, truck beds, or tents.




Use at least 20 feet away from people, animals, and structures with exhaust pointed away.




GROUND GENERATOR TO PREVENT ELECTRIC SHOCK

Add oil to engine crankcase



WITHOUT OIL GENERATOR WILL NOT START




Connect 12V battery


Gasoline Starting Procedure




ADD STABILIZER-TREATED FUEL




SELECT GASOLINE




TURN SWITCH TO ON



MANUAL START



ELECTRIC START




REMOTE START


LPG/Propane Starting Procedure




CONNECT PROPANE TANK - OPEN VALVE




SELECT LPG/PROPANE




TURN SWITCH TO ON



MANUAL START



ELECTRIC START



REMOTE START