



2" Solid Body Brass Combination Padlock

Operating Instructions

To open lock:


1. Rotate Combination Dials until your four digit code is seen on the code line.

Note: If starting with a new lock, set Combination Dials to default setting 0 - 0 - 0 - 0.

2. Press the Shackle down, then release.
The Shackle should pop up automatically.

To set a new combination:

1. Open lock.
2. Push Lever up to the top of the "Set Position" then rotate Combination Dials to desired code on code line.
3. Push Lever back down to its original position. The new combination is now set.

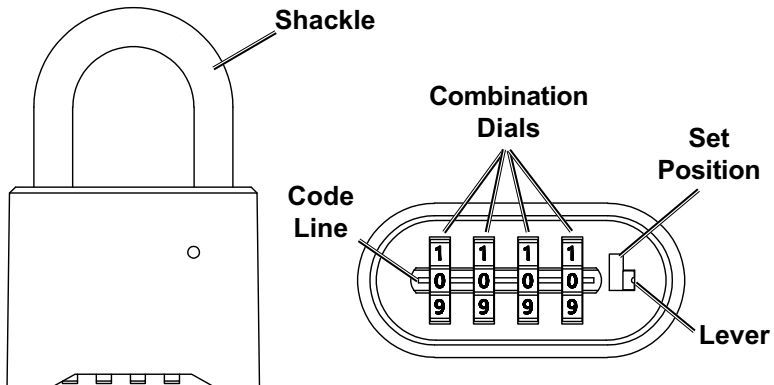

Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com