

Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.

201

HAULMASTER®

11" - 80" CENTER-FOLD STEEL SINGLE RAMP



Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

58114

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please call 1-888-866-5797 as soon as possible.

Copyright© 2020 by Harbor Freight Tools®. All rights reserved.
No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and service may not be included.

⚠ WARNING

Read this material before using this product. Failure to do so can result in serious injury. **SAVE THIS MANUAL.**

Specifications

Load Capacity	800 lbs.
Ramp Length	80-1/4 in.
Ramp Width	11 in.

IMPORTANT SAFETY INFORMATION



WARNING! TO PREVENT SERIOUS INJURY AND DEATH:

Read and understand all warnings and follow all instructions in this manual and this item's warning label exactly, especially when loading an ATV.

1. **Before use:**
 - a. Read and understand manual.
 - b. Inspect before every use; do not use if parts loose or damaged.
 - c. Turn vehicle's ignition OFF and set parking brake.
 - d. Clean dirt, oil and debris off ramp and allow ramp to dry.
 - e. Unfold ramp completely.
 - f. Set up only on solid, level, dry surface.
 - g. Turn ramp so flange end faces downward. Position ramp so that tongues fully contact tailgate.
 - h. Properly connect safety strap.
2. **Load and unload vehicle slowly. Do not ride vehicle up or down ramp.**
3. Do not exceed 800 lb capacity evenly distributed. Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
4. Use with 2-wheeled vehicles only. Do not use with ATVs or other 4-wheeled vehicles.
5. Use safety strap as intended only.
6. Use as intended only. Do not use:
 - a. as ladder,
 - b. if tailgate on carrying vehicle is higher than 40", or
 - c. to load vehicle with wheel width wider than ramp.
7. Ground contact. Use your Ramp on a solid, level, flat, dry surface. Make sure the tongues fully contact the tailgate of the vehicle.
8. **Clean Ramp.** Prior to each use, clean dirt, oil, or any debris off ramp.
9. **The Ramp is not designed to be used separately.**
10. **This product is not a toy.** Do not allow children to play with or near this item.
11. Maintain product labels and nameplates. These carry important safety information. If unreadable or missing, contact Harbor Freight Tools for a replacement.
12. **All persons not involved in the loading process must stand clear of the ramp. Keep children away.** Children must not be allowed in the work area.
13. **Do not exceed tailgate weight capacity.**
14. **Avoid working alone.** If an accident happens, an assistant can bring help.
15. **Keep work area clean and well lit.** Cluttered and dark areas invite injuries.
16. **Store idle equipment.** When not in use, store ramp in a dry location to inhibit rust.
17. **Dress properly.** Do not wear loose clothing or jewelry. Protective clothes and nonskid footwear are recommended when working. Wear restrictive hair covering to contain long hair.
18. **Wear ANSI-approved impact safety goggles, a safety helmet, and heavy-duty work gloves when loading, unloading or handling ramp.**
19. Keep proper footing and balance when loading or unloading. Do not walk on the ramp.
20. Before loading, line up vehicle with center of ramp. Keep wheels lined up with ramp at all times during loading.
21. Do not modify this product.
22. **Stay alert.** Watch what you are doing, use common sense. Do not use any ramp when you are tired.
23. **Check for damaged parts.** Before using any ramp, any part that appears damaged should be carefully checked to determine that it will perform its intended function. Check for any broken parts or mounting fixtures and any other condition that may affect proper operation. Any part that is damaged should be properly repaired or replaced by a qualified technician.

24. **Replacement parts and accessories.** When servicing, use only identical replacement parts. Use of any other parts will void the warranty. Only use accessories intended for use with this ramp.
25. **Do not use ramp if under the influence of alcohol or drugs.** Read warning labels on prescriptions to determine if your judgment or reflexes are impaired while taking drugs. If there is any doubt, do not use the ramp.
26. **Inspect Safety Strap before every use; do not use if parts loose, damaged, or deteriorated.**
27. The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.



SAVE THESE INSTRUCTIONS.

Setup and Operation Instructions



Read the **ENTIRE** IMPORTANT SAFETY INFORMATION section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

⚠ DANGER


TO PREVENT SERIOUS INJURY AND DEATH:

Before loading or unloading turn vehicle's engine off, set its transmission in gear or park, engage its emergency brake and block its wheels. Make sure the Ramp is clean and dry before loading or unloading.

Setup


CAUTION! Unfold the ramp completely, being careful not to pinch your hands.

1. The Ramp and tailgate the Ramp will sit on must be dry and clean. Check for and tighten any loose hardware.
2. Sit the Tongues (pre-assembled tips) of the Ramp on the tailgate. The Tongues must face down, and fully contact the truck's tailgate.

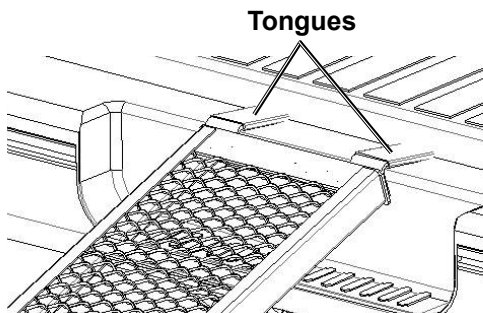

3. Select a rung towards the top of the Ramp and wrap Safety Strap (2) around the rung. Slide the hook through the strap's loop and tighten it.

4. Extend Safety Strap up into the inside of the truck bed; attach Strap's hook to a secure attachment point on the truck chassis.

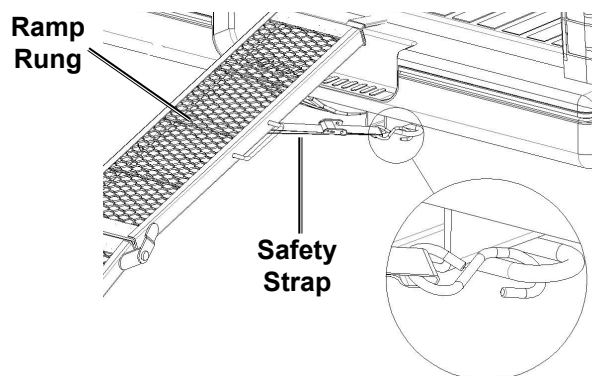

WARNING! TO PREVENT SERIOUS INJURY: Connect SAFETY strap to secure attachment points within the truck bed able to withstand the pulling force of loading. Strap must also be taut enough to prevent the Ramp from coming off the vehicle being loaded.

5. Pull the loose end of the Safety Strap to tighten, and press the buckle to release.
6. Adjust Safety Strap until it is tight and Ramp is firmly set on the tailgate.

Note: Store strap indoors after use.

2-Wheel Dirt Bike Loading and Unloading

⚠ DANGER

- These Ramps are for use with 2-wheeled vehicles only. Do not use these Ramps to load/unload 3-wheeled vehicles.
- Use with 2-wheeled vehicles only. Do not use with ATVs or other 4-wheeled vehicles.
- Do not use these Ramps to load or unload any vehicle that weighs more than 800 lb.
- Do not use these Ramps to load or unload any vehicle with wheel width wider than the Ramp.
- Do not use these Ramps to load or unload any vehicle that is carrying gear on its racks.
- Do not use these Ramps if the tailgate on the vehicle being loaded or unloaded is higher than half each Ramp's length (40").

WARNING! TO PREVENT SERIOUS INJURY: Riding an ATV while loading or unloading is dangerous and should not be attempted.

WARNING! Be aware of dynamic loading! Sudden load movement may briefly create excess load causing the Ramp to fail.

WARNING! TO PREVENT SERIOUS INJURY: All persons not involved in the process must stand clear of the Ramp and truck. Make sure no pets are nearby.

Loading


1. Do not attempt to load any dirt bike or other 2-wheel motor bike alone. Have a qualified adult assist.
 2. Line up the 2-wheel dirt bike with the Ramp.
 3. With one person pushing the dirt bike slowly up the Ramp, a helper should be in the bed of the hauling vehicle both to guide and to apply the brake if it is necessary to stop the dirt bike while it is on the Ramp. Have one person with a hand on the dirt bike hand brake for safety.
 4. Once the person inside the truck bed has hold of the handle bars, apply the brake and steady the dirt bike while the other person moves behind the dirt bike (but off to one side) and pushes it all the way into the truck bed.
- NOTE:** While most dirt bikes are light enough to safely load with two people, a third person can make the job easier and safer.
5. Once the dirt bike is safely loaded, secure it with four cam buckle tie-downs (not included), one on each side of the front, and one on each side at the rear of the dirt bike.

Unloading

1. Position the Ramp against the truck tailgate behind the rear tire of the dirt bike and attach the Safety Strap to the truck bed.
2. Remove the cam buckle tie-downs securing the Bike (not included).
3. Slowly and carefully while using an assistant, push the dirt bike backwards until the back tire is at the top of the Ramp. With one person on the ground behind and to the side of the Ramp, slowly push the dirt bike onto the Ramp. Someone must always hold the hand brake.
4. Slowly work the dirt bike down the Ramp and onto the ground.

Parts List and Diagram

Part	Description	Qty
1	Single Ramp	1
2	Safety Strap	1

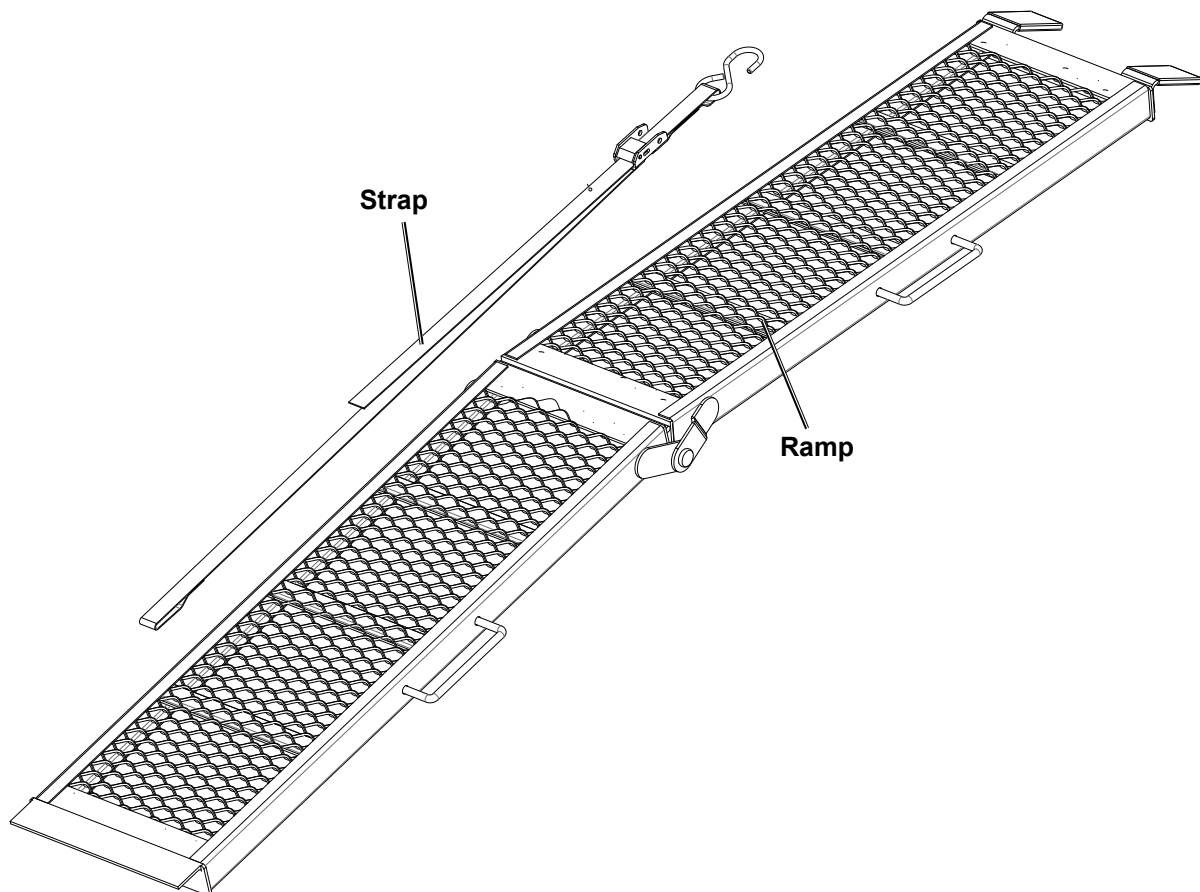

Record Serial Number Here:

Note: If product has no serial number, record month and year of purchase instead.

Note: Some parts are listed and shown for illustration purposes only, and are not available individually as replacement parts. Specify UPC 193175432520 when ordering parts.

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS DOCUMENT AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

Limited 90 Day Warranty

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly, to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear, or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.



26541 Agoura Road • Calabasas, CA 91302 • 1-888-866-5797