

RATCHETING LOAD BINDER

UPC 193175441065

SPECIFICATIONS

Capacity	5,400 lb
Minimum Closed Length	22.83" (580mm)
Maximum Extension Length	29.13" (740mm)
Chain Size	5/16" Grade 70 or 3/8" Grade 43

SAFETY WARNINGS

⚠ WARNING

Read all safety warnings and all instructions.
Failure to follow the warnings and instructions may result in serious injury or death to you or others, and/or damaged cargo.
Save all warnings and instructions for future reference.

1. **Do not operate a damaged or malfunctioning Binder.** Inspect Binder carefully and test operation before every use.
2. **Do not exceed 5,400 lb load limit.** Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
3. Wear ANSI-approved safety goggles, ANSI-approved hard hat, and steel-toed work boots during setup and use.
4. Use only approved handle extension. Do not use cheater bar.
5. Binder must be cleared of all obstacles while under tension.
6. **Do not operate Binder with twisted, kinked, or damaged chain.** Inspect chain carefully before every use.
7. Install in location that allows the operator to move and stay clear of the load.
8. Where slack chain hanging from the Binder may create a hazard, use an appropriate chain container (sold separately) to contain the excess chain.
9. Before using the Binder, refer to your equipment's manual and federal, state, jurisdiction and industry regulations for securing requirements.
10. This product is not a toy. Do not allow children to play with or near this item.


Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

OPERATION

⚠WARNING

To avoid serious injury: Do not operate while standing on the load. Move handle with caution! Stay clear of the handle as it may rebound while operating.

1. To secure Binder to chain around load:
 - a. Release the Pawl from the Binder Gear by pulling it open to the neutral position.
 - b. Twist Pipe to fully extend the Hooks. Do not extend beyond maximum extension length.
 - c. With the chain at a 45° angle to the load, connect Binder Hooks to the chain so it is as tight as possible.
 - d. Set the Pawl to the IN position and ratchet the Handle to tighten the chain.
 - e. Wrap slack chain around Binder, storing loose chain securely in a chain container.
2. To remove Binder from chain around load:
 - a. Unwrap slack chain from Binder.
 - b. Set the Pawl to OUT position and ratchet the Handle until the Hooks can be removed from the chain.
3. Clean, then lubricate pivot and swivel points. Retract Hooks and store Binder indoors away from children.

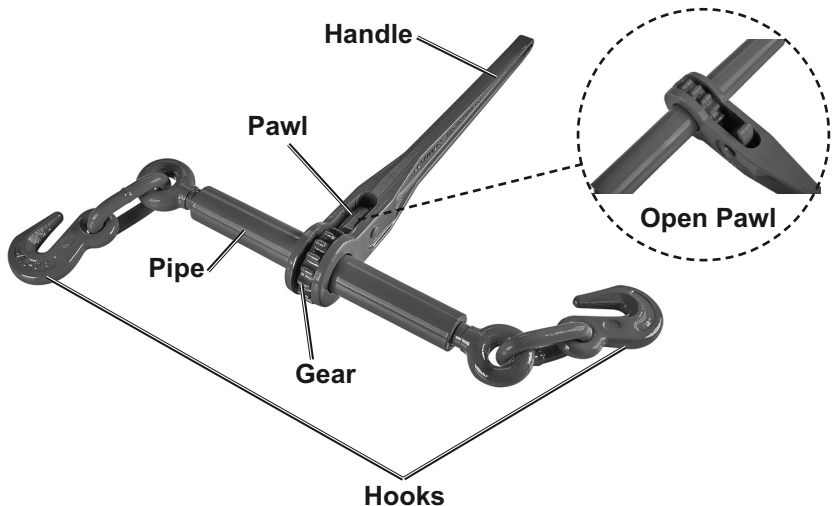

Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com