

EXTRA-LONG HIGH-LEVERAGE ONE-PIECE FLOOR JACK HANDLE

Instructions

Compatible only with Daytona and most Pittsburgh Steel Jacks.


Attach to Jack with Handle Release

1. To install Handle, pull on Handle Release and insert the grooved end of the Handle into the Handle Socket.
2. Let go of the Handle Release. Gently pull up on the Handle to make sure that it is secure.
3. Check that Jack operates correctly.



Attach to Jack with Handle Release Bolt

1. To install Handle, loosen Handle Release Bolt and insert the grooved end of the Handle into the Handle Socket.
2. Tighten Handle Release Bolt. Gently pull up on the Handle to make sure that it is secure.
3. Check that Jack operates correctly.

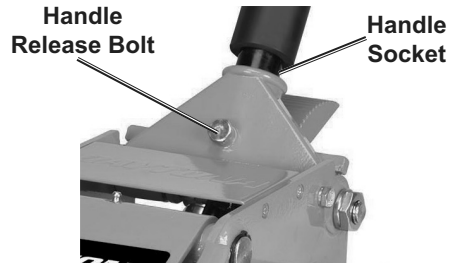

Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

For technical questions, please call 1-888-866-5797.