


Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.

23j

CENTRAL™ MACHINERY

6LB. DUAL DRUM ROTARY ROCK TUMBLER

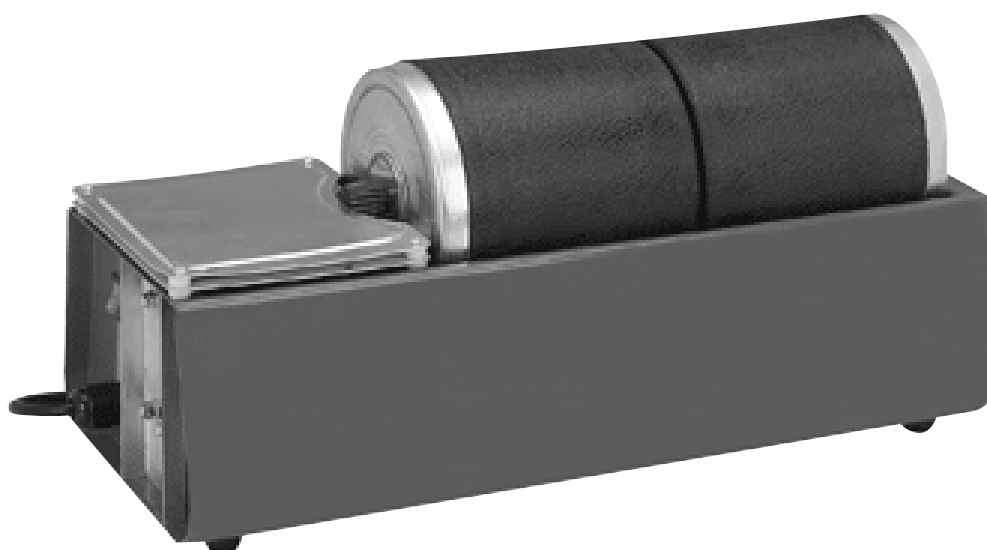

Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

59474

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please call 1-888-866-5797 as soon as possible.

Copyright© 2022 by Harbor Freight Tools®. All rights reserved.
No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and service may not be included.

⚠️WARNING






Read this material before using this product. Failure to do so can result in serious injury. **SAVE THIS MANUAL.**

Table of Contents

Safety	2	Maintenance	12
Specifications	6	Parts List and Diagram	14
Setup	7	Warranty	16
Operation	8		

CENTRALTM MACHINERY

WARNING SYMBOLS AND DEFINITIONS

	This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.
	Indicates a hazardous situation which, if not avoided, will result in death or serious injury.
	Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
	Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
	Addresses practices not related to personal injury.

IMPORTANT SAFETY INFORMATION

General Tool Safety Warnings

WARNING

Read all safety warnings and instructions.

Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

1. **KEEP WORK AREA CLEAN.**
Cluttered areas and benches invite accidents.
2. **DON'T USE IN DANGEROUS ENVIRONMENT.**
Don't use power tools in damp or wet locations, or expose them to rain. Keep work area well lighted.
3. **KEEP CHILDREN AWAY.** All visitors should be kept safe distance from work area.
4. **MAKE WORKSHOP KID PROOF** with padlocks, master switches, or by removing starter keys.
5. **DON'T FORCE TOOL.** It will do the job better and safer at the rate for which it was designed.
6. **USE RIGHT TOOL.** Don't force tool or attachment to do a job for which it was not designed.

Table A: RECOMMENDED MINIMUM WIRE GAUGE FOR EXTENSION CORDS (120 VOLT)				
NAMEPLATE AMPERES (at full load)	EXTENSION CORD LENGTH			
	25'	50'	100'	150'
0 – 6	18	16	16	14
6.1 – 10	18	16	14	12
10.1 – 12	16	16	14	12
12.1 – 16	14	12	Do not use.	

7. **USE PROPER EXTENSION CORD.** Make sure your extension cord is in good condition. When using an extension cord, be sure to use one heavy enough to carry the current your product will draw. An undersized cord will cause a drop in line voltage resulting in loss of power and overheating. Table A shows the correct size to use depending on cord length and nameplate ampere rating. If in doubt, use the next heavier gauge. The smaller the gauge number, the heavier the cord.
8. **WEAR PROPER APPAREL.** Do not wear loose clothing, neckties, rings, bracelets, or other jewelry which may get caught in moving parts. Non-slip footwear is recommended. Wear protective hair covering to contain long hair.
9. **ALWAYS USE SAFETY GLASSES.** Also use face or dust mask if cutting operation is dusty. Everyday eyeglasses only have impact resistant lenses, they are NOT safety glasses.
10. **MAINTAIN TOOLS WITH CARE.** Keep tools sharp and clean for best and safest performance. Follow instructions for lubricating and changing accessories.
11. **DISCONNECT TOOLS** before servicing; when changing accessories, such as blades, bits, cutters, and the like.
12. **REDUCE THE RISK OF UNINTENTIONAL STARTING.** Make sure switch is in off position before plugging in.
13. **USE RECOMMENDED ACCESSORIES.** Consult the owner's manual for recommended accessories. The use of improper accessories may cause risk of injury to persons.
14. **CHECK DAMAGED PARTS.** Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function – check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced.

Grounding Instructions



⚠️ WARNING

TO PREVENT ELECTRIC SHOCK AND DEATH FROM INCORRECT GROUNDING WIRE CONNECTION READ AND FOLLOW THESE INSTRUCTIONS:

110-120 VAC Grounded Tools: Tools with Three Prong Plugs

1. In the event of a malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This tool is equipped with an electric cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into a matching outlet that is properly installed and grounded in accordance with all local codes and ordinances.


2. Do not modify the plug provided – if it will not fit the outlet, have the proper outlet installed by a qualified electrician.

3. Improper connection of the equipment-grounding conductor can result in a risk of electric shock. The conductor with insulation having an outer surface that is green with or without yellow stripes is the equipment-grounding conductor. If repair or replacement of the electric cord or plug is necessary, do not connect the equipment-grounding conductor to a live terminal.

4. Check with a qualified electrician or service personnel if the grounding instructions are not completely understood, or if in doubt as to whether the tool is properly grounded.

5. Use only 3-wire extension cords that have 3-prong grounding plugs and 3-pole receptacles that accept the tool's plug.

6. Repair or replace damaged or worn cord immediately.

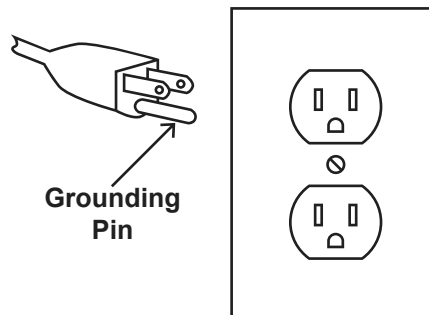

125 VAC 3-Prong Plug and Outlet
(for up to 125 VAC and up to 15 A)

7. This tool is intended for use on a circuit that has an outlet that looks like the one illustrated above in **125 VAC 3-Prong Plug and Outlet**. The tool has a grounding plug that looks like the plug illustrated above in **125 VAC 3-Prong Plug and Outlet**.

8. The outlet must be properly installed and grounded in accordance with all codes and ordinances.

9. Do not use an adapter to connect this tool to a different outlet.

Tumbler Safety Warnings

For Your Own Safety Read Instruction Manual Before Operating

1. **DO NOT USE OUTDOORS.**

2. **DO NOT USE WITH SAND.**

3. Do not overload Tumbler.

4. Do not place Tumbler on a table. The unit's vibration may cause the Tumbler to move when placed on a smooth, slippery surface.

5. Use only in a safe, accessible location (such as a garage floor) near a power outlet.

6. Do not use near flammable materials.

7. Do not use in a closet or drawer; the Tumbler requires proper ventilation.

8. Avoid extreme temperatures. Do not let Tumbler freeze as the water in the Rubber Barrel (12) will freeze and become unbalanced. This can overload the motor.

9. Do not touch motor immediately after use. Motor becomes hot to the touch during operation.

10. **DO NOT OPERATE WITH ANY GUARD DISABLED, DAMAGED, OR REMOVED. Moving guards must move freely and close instantly.**

11. The use of accessories or attachments not recommended by the manufacturer may result in a risk of injury to persons.

12. When servicing use only identical replacement parts.

13. Only use safety equipment that has been approved by an appropriate standards agency. Unapproved safety equipment may not provide adequate protection. Eye protection must be ANSI-approved and breathing protection must be NIOSH-approved for the specific hazards in the work area.
14. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
15. Industrial applications must follow OSHA guidelines.
16. Maintain labels and nameplates on the tool. These carry important safety information. If unreadable or missing, contact Harbor Freight Tools for a replacement.
17. Avoid unintentional starting. Prepare to begin work before turning on the tool.
18. People with pacemakers should consult their physician(s) before use. Electromagnetic fields in close proximity to heart pacemaker could cause pacemaker interference or pacemaker failure.
19. The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.



SAVE THESE INSTRUCTIONS.

CENTRALTM
MACHINERY

Specifications

Electrical Rating	120VAC / 60Hz / 0.447A
Capacity	3 lb. per drum
Barrel Type	Rubber (allows for quieter operation)

SAFETY

SETUP

OPERATION

MAINTENANCE

CENTRALTM
MACHINERY

Setup



Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

!WARNING

TO PREVENT SERIOUS INJURY FROM ACCIDENTAL OPERATION:

Turn the Power Switch of the tool off and unplug the tool from its electrical outlet before performing any procedure in this section.

Note: For additional information regarding the parts listed in the following pages, refer to the Assembly Diagram near the end of this manual.

How Tumbler Works

The motion in the Barrel of a Tumbler simulates the natural action of flowing water or ocean waves. Beaches and riverbeds contain rocks and pebbles smoothed by water and the abrasive sand it carries. As rocks grind upon one another with constant water and sand in the mix, they begin to round and smooth. Although this is a constant process, it does not however, naturally polish the rocks.

The Tumbler uses an abrasive media instead of sand. It is graded by grain size, from fine powder sized grains, up to large sized grains. By changing (usually by weekly intervals) the grain size, rotating from coarse, medium, to fine, the rock or gemstone is smoothed much more quickly than the natural process.

To polish using a Tumbler, add a metallic oxide compound (not included). The complete process for a gemstone or rock to go from rough to a smooth, polished finish, usually takes from 4-6 weeks.

Note: An Abrasive Kit (30956) is available from Harbor Freight Tools. The kit includes 4 oz. of coarse grit abrasive, 4 oz. fine grit, 2 oz. of pre-polish abrasive and 2 oz. of polish.

CENTRALTM
MACHINERY

Operating Instructions



Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

Tool Set Up

⚠️ WARNING

TO PREVENT SERIOUS INJURY FROM ACCIDENTAL OPERATION:

Turn the Power Switch of the tool off and unplug the tool from its electrical outlet before performing any procedure in this section.

TO PREVENT SERIOUS INJURY:

DO NOT OPERATE WITH ANY GUARD DISABLED, DAMAGED, OR REMOVED.

Moving guards must move freely and close instantly.

Workpiece and Work Area Set Up

1. Designate a work area that is applicable for prolonged Tumbler use. The work area must not allow access by children or pets to prevent distraction and injury.
2. Route the power cord along a safe route to reach the work area without creating a tripping hazard or exposing the power cord to possible damage. The power cord must reach the work area with enough extra length to allow free movement while working.

General Operating Instructions

1. Before the first use, and once a month thereafter, put a few drops of oil on the Driving Shaft (42) bearings.
2. Check the V-Belt (40) tension. It must be kept as loose as possible without allowing it to slip on the Pulley (36). Check before each use.
3. Make sure the exteriors of the Rubber Barrels (12) are clean so that they don't slip on the rollers. Wipe with a soapy cloth, then wipe clean with a damp cloth, and dry thoroughly. Do not use liquid cleaners or solvents.
4. Make sure that the Stops (6) are lightly touching each Barrel Lid (9). This will prevent the Barrel Lids from rubbing against the housing and will reduce friction.
5. To open either Rubber Barrel, remove the Barrels from the unit and then remove the Knurled Nuts (7) and the Washers (8). Next, remove the Barrel Lids (9).
6. Make sure that the Switch is in the off-position, then plug in the tool.

Note: It is imperative to load the Tumbler with the proper amount of materials, or the process will not be successful, and the motor could be damaged. Underloaded barrels will not lift rocks up the inner side walls allowing the cascading effect. Also, the abrasive material in an underloaded Tumbler will tend to form a slurry and will not be effective. An overloaded Tumbler will not allow the rocks to cascade. Lastly, too much water will cause the abrasives to float and not do their job.

7. Load your barrels from 1/2 to 3/4 full. More pointed or abrasive rocks or stones will require closer to 3/4 full, leaving a 1/2 full barrel when it comes time to polish.

Note: During tumbling, the stones will be somewhat reduced in size.

8. Choose stones that are similar in nature. They should have a mix of sizes ranging from small (3/16" to 3/8") to large (3/4" to 1"). 25% of the stones should be in the smaller range. Split the remaining volume between medium sized (3/8" to 5/8") and large sized (5/8" to 1") stones.

WARNING! TO PREVENT SERIOUS INJURY FROM BURNS: Allow to cool before adjusting or unloading.

9. For best results, use a four step polish process.
 - a. First, use a silicon carbide grain, 60-90 grit size.
 - b. Second, use a fine silicon carbide grain, 220 grit or a little finer.
 - c. Next, use a 600 grit silicon carbide grain or a pre-polish.
 - d. Lastly, use a polish of Tin Oxide, Cerium Oxide, or Titanium Dioxide.

When tumbling hard materials, it might be necessary to repeat the steps.

Coarse Grind	4 Tbsp.
Medium	4 Tbsp
Pre-polish	6 Tbsp.
Polish	6 Tbsp.
Burnish (soap)	1 Tbsp.
Pellets (such as 97818)	Used to fill up extra space.

Table B: Amounts of abrasive (per Tumbler barrel)

10. Add enough water to reach the bottom of the top layer of rocks.
11. Seal the Rubber Barrels and replace the Barrel Lids, Knurled Nuts and the Washers.
12. Set the Rubber Barrels on the rollers and turn on the Power Switch (27). Make sure to check the Lid seal during the first ten minutes to make sure the tumbler isn't leaking.

CAUTION! Check the Tumbler on a regular basis to make sure the unit is running properly and is not over-heating. Make sure that conditions around the tumbler are unchanged, and that the tumbler continues to operate in a safe location.

Note: You can use this Tumbler to work with metal and metal jewelry (without gemstones). This Tumbler may be used to take the jagged, sharp edges off of small metal parts. To polish brass, gold, silver, or copper, use polishing media designed for that specific purpose.

Note: For more in-depth information on polishing jewelry, we recommend you purchase a jewelry polishing handbook.

13. To prevent accidents, turn off the tool and unplug the tool from its electrical outlet after use. Clean, then store the tool indoors out of children's reach.

Grind, Pre-Polish, Polish, and Burnishing

SAFETY

First Grind

1. Run the Tumbler for 24 hours, checking for gas build-up at the first twelve hours.
2. Slowly open the Barrel Lid, releasing the small amount of gas that builds up during the process. Stones should show slightly rounded edges.
3. Clean the seals and close the Lids.

Note: It is important to release the gas, otherwise it will thicken the abrasive slurry.

4. After another 24 hours, check again. If the slurry is thickening, add a little water.
5. Run for one hour and check again. If it is still thick, add some more water.
6. Let the Tumbler run continuously, but check daily. Continue this process for seven to ten days to remove the sharp edges and rough areas. Be patient. This is the most important step. When all of the edges are rounded, you are ready for the next step.

Note: Between steps you must clean the Rubber Barrels and stones. Pour off the slurry into a disposable container (such as a milk carton) and take care that the stones remain in the Rubber Barrels.

Note: Never pour the slurry into your home plumbing system.

To Clean Rubber Barrels:

7. Place stones into a clean container.
8. Fill the Rubber Barrels 1/2 full with water and clean out the remaining slurry and grit. Wipe and dry with a paper towel.
9. To clean the stones, gently slosh them around in clean water and remove them a few at a time, checking for breaks or cracks. Discard broken or cracked stones.
10. Place stones in a colander or old nylon sock and rinse them completely off. There should be no slurry or grit remaining on the stones.

SETUP

Second Grind

1. Carefully replace stones into Rubber Barrels. If Rubber Barrels are less than 1/2 full, add pellets (not included) to make up the difference. Add medium grit (see page 5) and water up to the bottom of the top layer of rocks.
2. Reseal and tumble.
3. Run for two to three days before checking. Stones will begin to smooth. After seven days they should have a smooth finish. If not, let them go another two to three days. Clean again as you did after the first grind.

OPERATION

Pre-polish

1. Place stones into the Rubber Barrels adding the correct amount of pre-polish and pellets (not included) if necessary, and water.
2. Let Tumbler run for a week, checking every other day.
3. After a week take out two or three stones to test the progress. On a dampened piece of leather, old rug, or towel, sprinkle a small amount of polishing compound, and rub stones vigorously with it. You should see a definite shine in a few moments.
4. If stones shine, clean the Rubber Barrels again in preparation for the last step. If not, continue pre-polish and check again in 24 hours.

MAINTENANCE

Polish

1. Gently set stones in the Rubber Barrels.
2. Load the tumbler with fresh water, polishing compound, and pellets to help cushion the stones. Make sure the volume is at least 1/2 full, preferably 3/4 full.
3. Tumble for five to seven days.
4. If stones look the same dry as they do wet, then they are finished. If they have a slight film, they need to be burnished.

Burnish

1. Remove stones, clean Rubber Barrels and remove and recover pellets (set aside).
2. Place stones back in the Rubber Barrels with the same pellets.
3. Add powdered soap, such as Ivory® or White King®. Do not use liquid detergents or dishwasher powders that have bleach.
4. Add water as in previous steps and seal the Rubber Barrels.
5. Tumble for four days.
6. Remove stones and clean the Barrels.

Notes to remember:

1. Clean Barrels and stones between all steps.
2. When polishing or burnishing, use pellets.
3. Pellets will wear out during use.
4. Use a log book to keep track of each step.
5. If starting with stream-worn or smooth stones, you may be able to eliminate the first step.
6. Purchase a mineral book which details selection of stones for tumbling. As you learn about relative hardness of each stone you will achieve greater success by not mixing soft and hard stones.
7. Dispose of slurry material properly.

CENTRAL
MACHINERY

Maintenance and Servicing



Procedures not specifically explained in this manual must be performed only by a qualified technician.

⚠️ WARNING

TO PREVENT SERIOUS INJURY FROM ACCIDENTAL OPERATION:

Turn the Power Switch of the tool off and unplug the tool from its electrical outlet before performing any procedure in this section.

TO PREVENT SERIOUS INJURY FROM TOOL FAILURE:


Do not use damaged equipment. If abnormal noise or vibration occurs, have the problem corrected before further use.

Cleaning, Maintenance, and Lubrication

1. **BEFORE FIRST USE** and once a month following, put a few drops of oil on the Driving Shaft Bearings (42).
2. **BEFORE EACH USE**, inspect the general condition of the tool. Check for:
 - loose hardware,
 - misalignment or binding of moving parts,
 - cracked or broken parts,
 - damaged electrical wiring, and
 - any other condition that may affect its safe operation.
3. **AFTER USE**, wipe external surfaces of the tool with clean cloth.
4. Clean the exterior of the Rubber Barrels so that neither one slips on the rollers. Wipe each with a soapy cloth, then wipe clean with a damp cloth. Dry thoroughly. Do not use liquid cleaners or solvents.
5. Periodically, wear ANSI-approved safety goggles and NIOSH-approved breathing protection and blow dust out of the motor vents using dry compressed air.
6. **⚠️ WARNING!** If the supply cord of this power tool is damaged, it must be replaced only by a qualified service technician.

Belt Inspection and Tensioning

1. Unplug the Power Cord (28) from its outlet.
2. Turn unit over. Loosen the Screws (35) and remove the Screen (34).
3. Examine belt for cracks, tears in the backing, or other damage. Replacement V-Belts are sold under 93835. Replace belt if damaged according to steps below:
 - a. Loosen the motor mounting bolts and slide the motor towards the other pulley as far as possible.
 - b. Slide the old belt off of the smallest pulley first, then remove it.
 - c. Put the new belt around the larger pulley first, then around the smaller pulley.
 - d. Move the motor away from the other pulley until it is properly tensioned according to the directions below. Tighten the motor mounting bolts.
4. Check and adjust belt tension. Belt must be kept as loose as possible without allowing it to slip on Pulley.
 - a. Press on the center of the longest span on the belt with moderate finger pressure. Then measure the deflection distance, the distance that the belt moved.
 - b. **If the belt deflects too much**, tighten belt by loosening the motor mounting bolts and moving the motor away from the other pulley slightly. Secure motor mounting bolts and retest tension. If the belt is too long to be properly tensioned, it must be replaced.
 - c. **If the belt deflects too little**, loosen belt by loosening the motor mounting bolts and moving the motor towards the other pulley very slightly. Secure motor mounting bolts and retest tension.
 - d. Reinstall the Screen and four Screws.
5. Ensure Pulley is aligned when viewed from above the Tumbler. If not aligned, adjust Pulley by loosening Set Screws (43) and sliding the Pulley along the shaft. Tighten Set Screws before use.

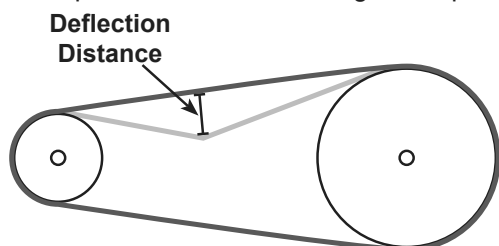

Troubleshooting

Problem	Possible Causes	Likely Solutions
Tool will not start.	<ol style="list-style-type: none"> 1. Cord not connected. 2. No power at outlet. 3. Tool's thermal reset breaker tripped (if equipped). 4. Internal damage or wear. (Carbon brushes or switch, for example.) 	<ol style="list-style-type: none"> 1. Check that cord is plugged in. 2. Check power at outlet. If outlet is unpowered, turn off tool and check circuit breaker. If breaker is tripped, make sure circuit is right capacity for tool and circuit has no other loads. 3. Turn off tool and allow to cool. Press reset button on tool. 4. Have technician service tool.
Tool operates slowly.	Extension cord too long or wire size too small.	Eliminate use of extension cord. If an extension cord is needed, use one with the proper diameter for its length and load. See Table A on page 3.
Performance decreases over time.	<ol style="list-style-type: none"> 1. Accessory dull or damaged. 2. Carbon brushes worn or damaged. 	<ol style="list-style-type: none"> 1. Keep cutting accessories sharp. Replace as needed. 2. Have qualified technician replace brushes.
Excessive noise or rattling.	<ol style="list-style-type: none"> 1. Internal damage or wear. (Carbon brushes or bearings, for example.) 2. Belt too loose (slipping) or too tight (bearing damage). 	<ol style="list-style-type: none"> 1. Have technician service tool. 2. Properly tension belt.
Overheating.	<ol style="list-style-type: none"> 1. Forcing machine to work too fast. 2. Accessory dull or damaged. 3. Blocked motor housing vents. 4. Motor being strained by long or small diameter extension cord. 5. Belt misaligned. 	<ol style="list-style-type: none"> 1. Allow machine to work at its own rate. 2. Keep cutting accessories sharp. Replace as needed. 3. Wear ANSI-approved safety goggles and NIOSH-approved dust mask/respirator while blowing dust out of motor using compressed air. 4. Eliminate use of extension cord. If an extension cord is needed, use one with the proper diameter for its length and load. See Table A on page 3. 5. Align belt and check belt tension. See Belt Inspection and Tensioning on page 12.



**Follow all safety precautions whenever diagnosing or servicing the tool.
Disconnect power supply before service.**

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

Parts List

Part	Description	Qty
1	Screw (M3x5)	6
2	Shaft Cover	2
3	Bushing Set	4
4	Shaft A	1
5	Idler Shaft Set	2
6	Stop	2
7	Knurled Nut	2
8	Washer	2
9	Barrel Lid	2
10	Boot Gasket	2
11	Inner Lid	2
12	Rubber Barrel	2
13	Top Cover	1
14	Screws (M3x16)	4
15	Middle Plate	1
16	Spacer (B)	4
17	Fan	1
18	Square Nuts	2
19	Motor	1
20	Motor Connectors	2
21	Spacer	4
22	Inner Nut	1


Part	Description	Qty
23	Adjusting Plate	1
24	Washers (Ø4)	4
25	Spring Washers (Ø4)	4
26	Screws (M4x50)	4
27	Power Switch	1
28	Power Plug/Cord	1
29	Plug	1
30	Outer Nut	1
31	Small Set	1
32	Nuts Connector	1
33	Foot A	4
34	Screen	1
35	Screws (M4x8)	6
36	Pulley	1
37	Snap Ring (Ø8)	4
38	Washer (Ø8)	1
39	Foot B	2
40	V-Belt	1
41	Base	1
42	Driving Shaft	1
43	Set Screw	2

Record Product's Serial Number Here: _____

Note: If product has no serial number, record month and year of purchase instead.

Note: Some parts are listed and shown for illustration purposes only, and are not available individually as replacement parts. Specify UPC 193175471840 when ordering parts.

Assembly Diagram

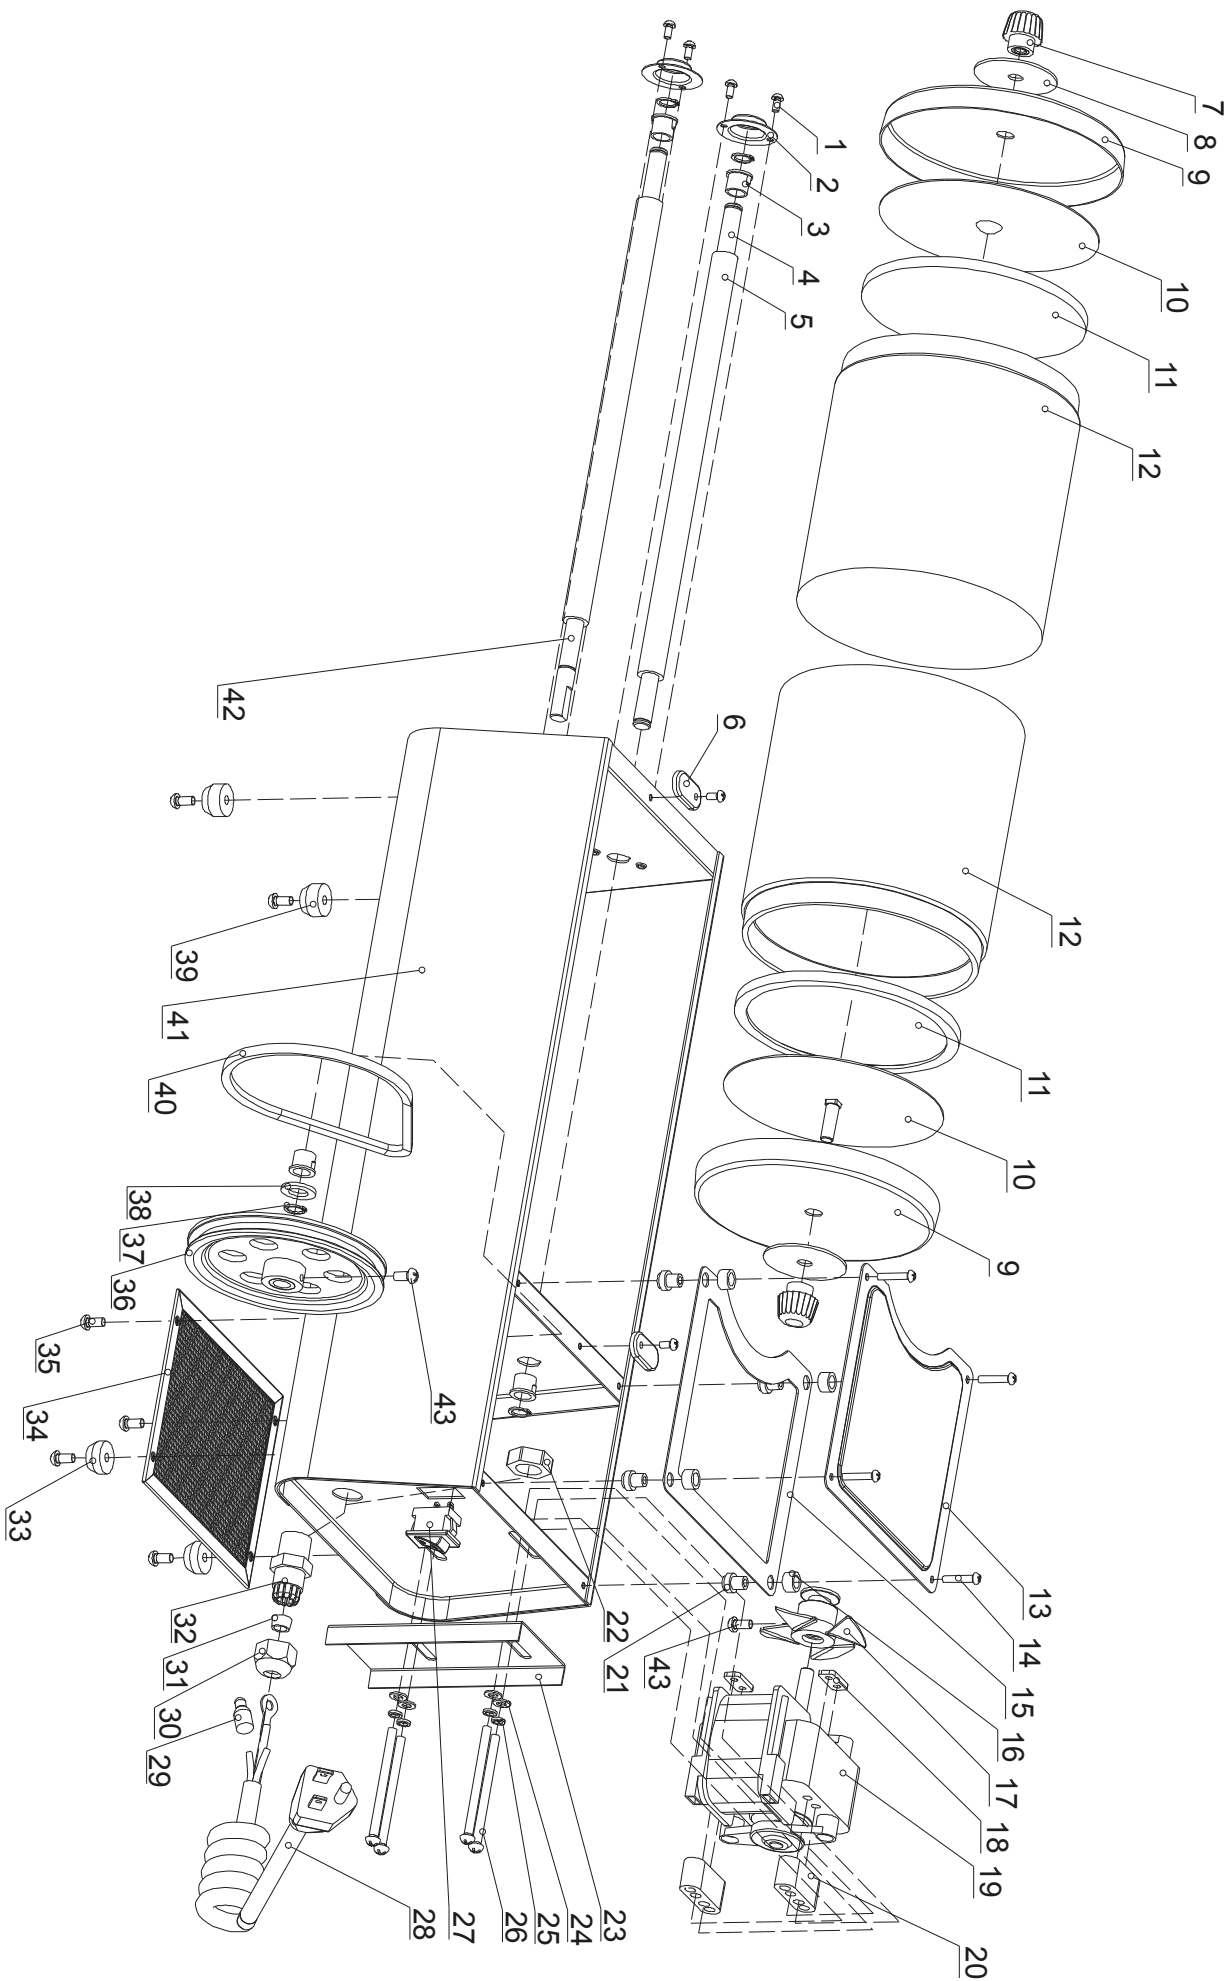

Limited 90 Day Warranty

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly, to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear, or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

CENTRAL[™]
MACHINERY

26677 Agoura Road • Calabasas, CA 91302 • 1-888-866-5797