

Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.

22j

HAULMASTER®

TANDEM AXLE STABILIZERS



Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

59665

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please call 1-888-866-5797 as soon as possible.

Copyright© 2022 by Harbor Freight Tools®. All rights reserved.
No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein.
Tools required for assembly and service may not be included.

⚠ WARNING

Read this material before using this product.
Failure to do so can result in serious injury.
SAVE THIS MANUAL.

Specifications

Expansion Range

3-1/2"-12"

IMPORTANT SAFETY INFORMATION


1. Stabilizers are intended for stabilization only and will not prevent a trailer from rolling. Trailer must be parked and leveled with tires chocked in front and back on both sides of the trailer before using stabilizers.
2. Use only with tire spacing ranging from 3-1/2" - 12".
3. This product is not a toy. Do not allow children to play with or near this item.
4. Be sure to remove Stabilizers before hitching, lifting, or moving trailer.
5. Use as intended only.
6. Inspect before every use; do not use if parts are loose or damaged.
7. **Be aware of dynamic loading!** Sudden load movement may briefly create excess load causing product failure.
8. Maintain product labels and nameplates. These carry important safety information. If unreadable or missing, contact Harbor Freight Tools for a replacement.

Setup - Before Use:



Read the **ENTIRE** IMPORTANT SAFETY INFORMATION section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

Functions

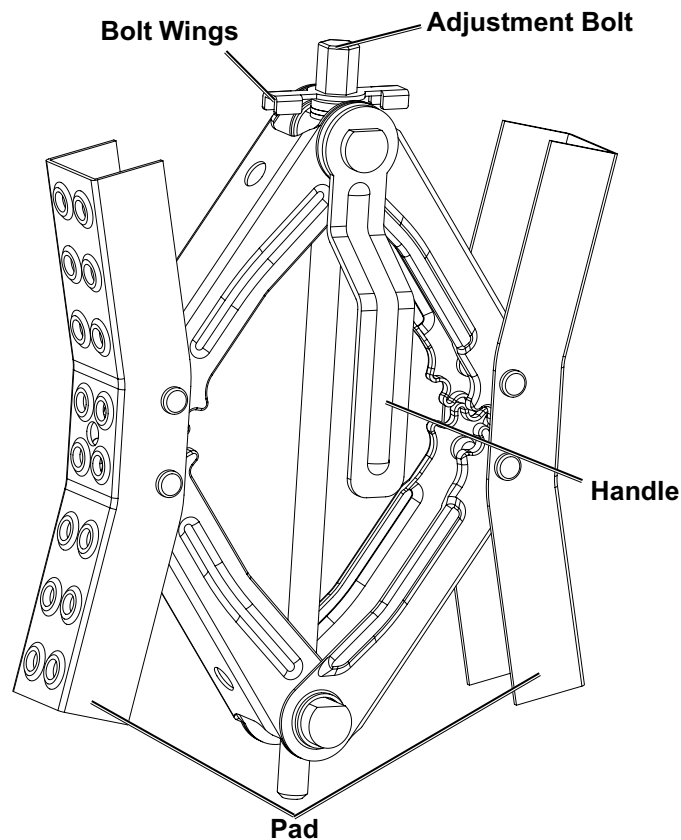

Operating Instructions



Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this document including all text under subheadings therein before set up or use of this product.

WARNING! TO PREVENT SERIOUS INJURY: Axle stabilizers are intended for stabilization only and will not prevent a trailer from rolling. Trailer must be parked and leveled with tires chocked in front and back on both sides of the trailer before using stabilizers.

Installation

NOTICE: Stabilizers must be placed vertically between tires, if placed horizontally, tire damage or rocking may occur.

1. Place a Stabilizer vertically between two tires so the Pads will make contact with the tire treads and tighten Bolt Wings by hand until snug.



Note: Stabilizers can be flipped upside down if fenders are causing interference.

2. Use included Wrench to tighten Adjustment Bolt (clockwise) until Stabilizer is wedged firmly between tires.

NOTICE: Adjustment Bolt must be fully tightened with Wrench.

3. Repeat steps 1-2 for other side of trailer.

WARNING! TO PREVENT SERIOUS INJURY: Be sure to remove Stabilizers before hitching, lifting, or moving trailer.

Removal

Use included Wrench to loosen Adjustment Nut (counterclockwise) and remove Stabilizers.

Record Serial Number Here:

Note: If product has no serial number, record month and year of purchase instead.

Note: Replacement parts are not available for this item. Refer to UPC 193175478085.

Limited 90 Day Warranty

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly, to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear, or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

The logo for HaulMaster, featuring the word "HAULMASTER" in a bold, italicized, sans-serif font. The letters are white with a thick black outline, and a registered trademark symbol (®) is located at the bottom right of the word.

26677 Agoura Road • Calabasas, CA 91302 • 1-888-866-5797