

Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.


REV 15k

ITEM 62807

HaulMaster®

Over-The-Wheel

TIE DOWN BONNET

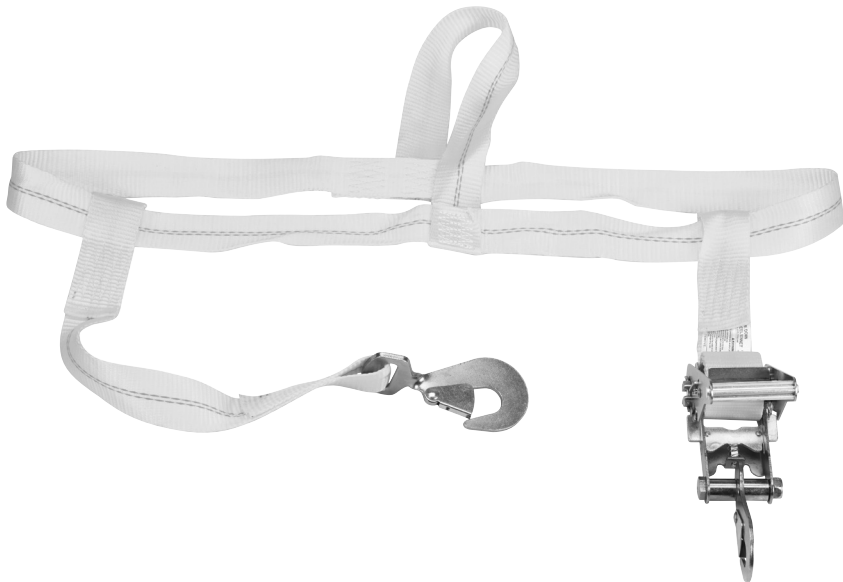

Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please call 1-888-866-5797 as soon as possible.

Copyright© 2015 by Harbor Freight Tools®. All rights reserved.

No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and service may not be included.

⚠WARNING

**Read this material before using this product.
Failure to do so can result in serious injury.
SAVE THIS MANUAL.**

IMPORTANT SAFETY INFORMATION

1. Keep work area clean and well lit. *Cluttered or dark areas invite accidents.*
2. **Keep children and bystanders away while securing the Tie Down. *Distractions can cause you to lose control.***
3. Stay alert, watch what you are doing and use common sense when connecting the Tie Down. Do not use it to secure an object while you are tired or under the influence of drugs, alcohol or medication. *A moment of inattention while attaching may result in serious personal injury.*
4. **Use safety equipment. Always wear eye protection. Safety equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.**
5. Do not overreach. Keep proper footing and balance at all times. *This enables better control of the Tie Down in unexpected situations.*
6. Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts. *Loose clothes, jewelry or long hair can be caught in moving parts.*
7. Lock Handle down before use.
8. Do not exceed the working load of 3,333 pounds.
9. Obey all D.O.T. regulations regarding use.
10. Only use in pairs.
11. Check the attachment points every 25 miles during transit.
12. Use as intended only. Tie Down is intended for use in a looped connection to secure tires during transit. Do not use for lifting operations. Do not use to secure cargo.
13. Do not force the Tie Down. Use the correct product for your application.
14. Maintain Tie Downs. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect its operation. If damaged, have the Tie Down repaired before use. *Many accidents are caused by poorly maintained products.*
15. Use the Tie Down in accordance with these instructions and in the manner intended for the particular type of product, taking into account the working conditions and the work to be performed. *Use of the product for operations different from those intended could result in a hazardous situation.*
16. Maintain labels and nameplates on the Tie Down. These carry important safety information. If unreadable or missing, contact Harbor Freight Tools for a replacement.
17. This product is not a toy. Keep it out of reach of children.
18. The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

Specifications

Working Load	3,333 lb Vehicle Weight
Wheel Diameter	14" - 17"
Tread Width	up to 9"

Operating Instructions



Read the **ENTIRE GENERAL SAFETY RULES** section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

Note: For additional information regarding the parts listed in the following pages, refer to the Assembly Diagram near the end of this manual.

1. Place the Wheel Bonnet Tie Down over the tire of the vehicle being moved. Adjust the Hook end so that the bonnet is tight.
2. Attach the Hook End to a solid anchor point. The safety clamp of the hook should be completely closed.
3. Secure the hook at the Ratchet End to a solid connection point on the trailer that will not be damaged by tension.
4. Push the strap through the Ratchet's drum, then open and close the ratchet handle to tighten strap over the tire. Avoid pinching fingers when working ratchet assembly. Lock handle down before use.
5. Tie down anchor points must be secure. Check the attachment points every 25 miles during transit.
6. To release Ratchet, use two fingers to pull back the spring loaded release lever located in Ratchet handle. Raise the handle until release lever locks in fully open position. In this position, the drum turns free. The strap can now be pulled free from ratchet drum.
7. Clean, then store the tool indoors out of children's reach.



Maintenance and Servicing

⚠ WARNING

Damaged equipment can fail, causing serious personal injury. Do not use damaged equipment.

1. **BEFORE EACH USE**, inspect the general condition of the tool. Check for loose hardware, misalignment or binding of moving parts, cracked or broken parts and any other condition that may affect its safe operation.
2. **AFTER USE**, clean external surfaces of the tool with clean, damp cloth.

Limited 90 Day Warranty

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly, to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear, or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

