




4 GAL twin tank air compressor

START UP GUIDE


If Compressor does not start:
a. Turn Switch OFF.
b. Press Reset Button.
c. Turn Switch ON.




Turn Switch OFF to release any remaining pressure.




Close DRAIN VALVE at bottom of lower tank.

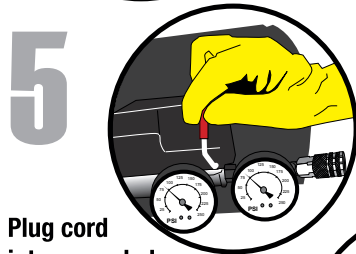


Plug cord into grounded 120 volt outlet and turn POWER SWITCH on.




Connect AIR LINE to Coupler.

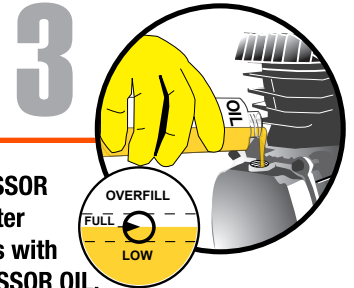

Fill COMPRESSOR PUMP to center of sight glass with AIR COMPRESSOR OIL.



Typical Air Line Setup

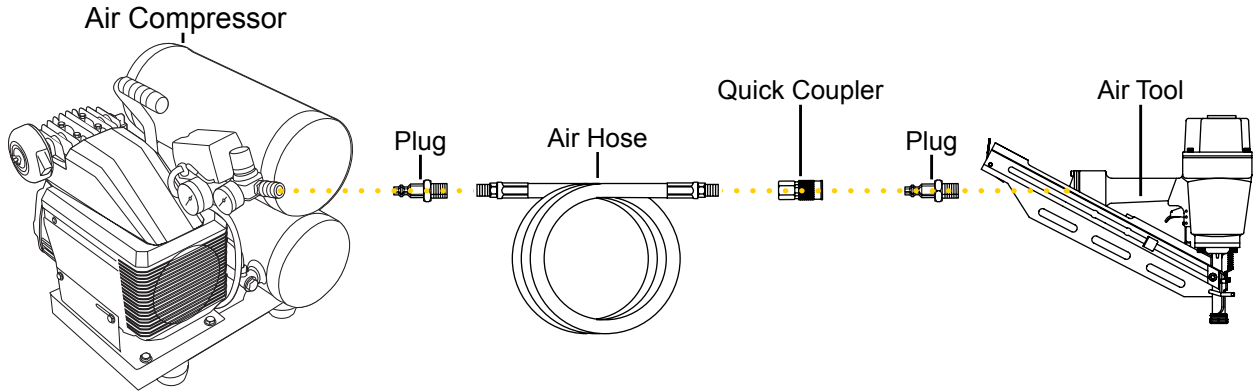

Thread seal tape is recommended for all threaded connections.

Recommended Accessories

- Air Hose
- 1/4" Accessory Kit



Use of an extension cord is not recommended.

4 GAL compresor de aire con tanques gemelos


GUÍA DE ARRANQUE

Si el Compresor no arranca:

- Coloque el interruptor OFF.
- Botón de reinicio de prensa.
- Coloque el interruptor ON.




Coloque el interruptor OFF para liberar la presión restante.



Cierre la VÁLVULA DE DRENAJE en la parte inferior del tanque.



Conecte el cable en un tomacorriente con descarga a tierra de 120 voltios y encienda el INTERRUPTOR.




Conecte LA LÍNEA DE AIRE al Acoplador.



Llene la BOMBA DEL COMPRESOR con ACEITE PARA COMPRESOR DE AIRE hasta el centro de la mirilla de cristal.

Conexión típica de la línea de aire

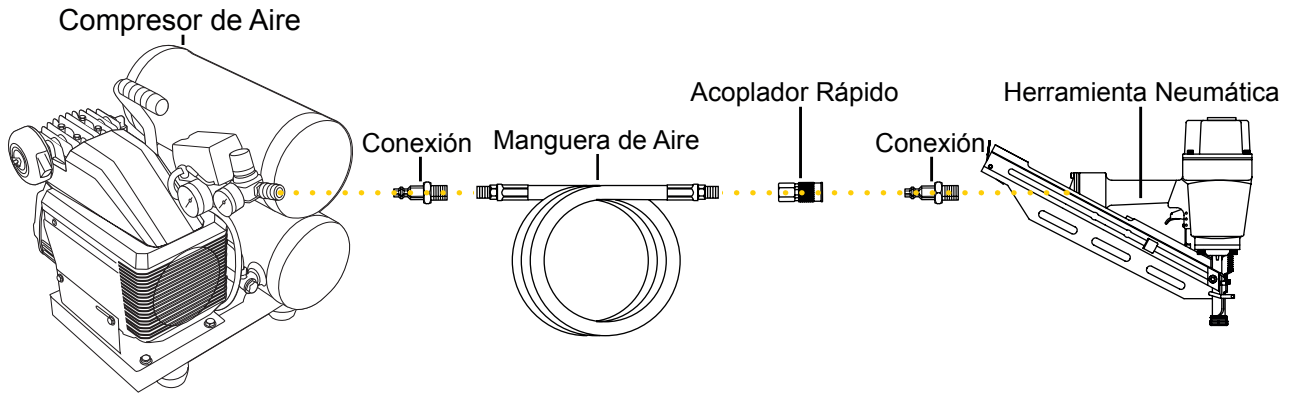

Se recomienda usar cinta selladora para las roscas en todas las conexiones.

Accesorios Recomendados

- Manguera de Aire
- Kit de Accesorios de 1/4"

No se recomienda usar extensiones de cable.