

Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.

24c

PITTSBURGH®

16 PC. BRAKE BLEEDER AND VACUUM PUMP KIT



Visit our website at: <http://www.harborfreight.com>
Email our technical support at: productsupport@harborfreight.com

63391

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please call 1-888-866-5797 as soon as possible.

⚠WARNING

Read this material before using this product. Failure to do so can result in serious injury. **SAVE THIS MANUAL.**

Copyright © 2024 by Harbor Freight Tools®. All rights reserved.

No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and service may not be included.

Specifications

Gauge Range	0-30 in. of mercury (inHg)
	0-760 mmHg

Important Safety Information

WARNING!

READ AND UNDERSTAND ALL INSTRUCTIONS

Failure to follow instructions listed below may result in serious injury.

SAVE THESE INSTRUCTIONS

- 1. Keep bystanders, children, and visitors away while operating the Vacuum Pump.** Distractions can cause you to lose control. Protect others in the work area from injury.
- 2. Stay alert. Watch what you are doing, and use common sense when operating the Vacuum Pump. Do not use the tool while tired or under the influence of drugs, alcohol, or medication.** A moment of inattention while operating the tool may result in serious personal injury.
- 3. Dress properly. Do not wear loose clothing or jewelry. Contain long hair. Keep your hair, clothing, and jewelry away from moving parts.** Loose clothes, jewelry, or long hair can be caught in moving parts.
- 4. Do not overreach. Keep proper footing and balance at all times.** Proper footing and balance enables better control of the tool in unexpected situations.
- 5. Use safety equipment.** Wear ANSI-approved safety glasses underneath a full face safety shield. Nonskid safety shoes, hard hat, or hearing protection must be used for appropriate conditions.
- 6. Do not force the tool. Use the correct tool for your application.** The correct tool will do the job better and safer at the rate for which it is designed.
- 7. Store idle tools out of reach of children and other untrained persons.** Tools are dangerous in the hands of untrained users.
- 8. Maintain tools with care. Keep tools dry and clean.** Properly maintained tools are less likely to bind and are easier to control. Do not use a damaged tool. Tag damaged tools "Do not use" until repaired.
- 9. Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the tool's operation. If damaged, have the tool serviced before using.** Many accidents are caused by poorly maintained tools.
- 10. Use only accessories that are recommended by the manufacturer for your model.** Accessories that may be suitable for one tool may become hazardous when used on another tool.

11. **Tool service must be performed only by qualified repair personnel.** Service or maintenance performed by unqualified personnel could result in a risk of injury.
12. **When servicing a tool, use only identical replacement parts. Follow instructions in the section of this manual.** Use of unauthorized parts or failure to follow maintenance instructions may create a risk of injury.
13. **Maintain a safe working environment.** Keep the work area well lit. Make sure there is adequate surrounding workspace. Keep the work area free of obstructions, grease, oil, trash, and other debris. Do not use this product in a damp or wet location.
14. **Maintain labels and nameplates on this product.** These carry important information. If unreadable or missing, contact Harbor Freight Tools for a replacement.
15. **Keep the handle dry, clean, and free from brake fluid, oil, and grease.**
16. **Before use read and understand all warnings, safety precautions, and instructions as outlined in the vehicle manufacturer's service manual.** Every vehicle has specific measurement values for vacuum related readings. It is beyond the scope of this manual to properly describe the correct procedure and test data for each vehicle.
17. **Carbon monoxide is produced while a vehicle's engine is operating and is deadly in a closed environment.** Early signs of carbon monoxide poisoning resemble the flu, with headaches, dizziness, or nausea. If you have these signs, the work area may not be vented properly. Get fresh air immediately.
18. **People with pacemakers should consult their physician(s) before use.** Electromagnetic fields in close proximity to heart pacemaker could cause pacemaker interference or pacemaker failure. Caution is necessary when near coil, spark plug cables, or distributor of running engine. Engine should be off during distributor adjustment.
19. **Prior to using the Vacuum Pump, place the vehicle's transmission in "PARK" (if automatic) or "NEUTRAL" (if manual). Then, block the tires with chocks.**
20. **Be alert for hot engine parts to avoid accidental burns.**
21. **Use the Brake Bleeder only with brake fluid.** Do not attempt to use the tool to siphon any other liquids. Damage to the internal chamber and seal, or future brake fluid contamination may result.
22. **Follow guidelines for proper brake fluid disposal.** Used brake fluid should be removed from the vehicle and properly recycled. Many states require recycling. Contact your local solid/liquid waste authority for information on recycling. Do not reuse old brake fluid.
23. **Brake fluid may damage paint.** Clean up spilled fluid quickly.
24. The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur. The operator must understand that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

Setup Instructions

1. Open the Cup (3).
2. Seat the O-ring (11) completely into the groove in the top of the Cup.
3. Remove and discard the shipping spacer that prevents the Vacuum Pump (1) handle from moving through its full range.
4. Cover the inlet of the Vacuum Pump with something such as a plastic bag. **To prevent injury, DO NOT USE YOUR SKIN TO PLUG THE INLET.** Operate the pump several times to create the vacuum. The vacuum should not decrease quickly. If air is entering through the vacuum release valve, tighten it. After the pump properly holds a vacuum, press in the Pump's vacuum release valve to release the vacuum. Set the plastic bag aside.
5. The vacuum pump should now be ready for use.



Operating Instructions



Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this document including all text under subheadings therein before set up or use of this product.

Vacuum System Testing

1. Position the vehicle in a flat, level outdoor area. Set the parking brake and chock the tires.
2. Attach a 23" Hose (4) to the Vacuum Pump (1).
3. Attach the other end of the Hose to the vacuum system. Keep clear of parts that will move or get hot while an assistant starts the engine. Wait until the vacuum reading stabilizes and compare it to the manufacturer's specification.
4. After obtaining a measurement, shut off the engine.
5. A low or unstable vacuum reading may mean a vacuum leak, vacuum line blockage, cylinder sealing problems, incorrect valve/ignition timing, or other issues.
Note: Vehicle vacuum systems will differ. Consult the vehicle's service manual for proper testing procedures.
6. After testing is complete, disconnect the Vacuum Pump and Hose, remove any plugs or clamps and secure all vacuum lines.

Brake Bleeding

1. Attach a 3" Hose (5) to the bottom of the Suction Lid (2a).
2. Attach a 23" Hose (4) to the port on the top of the Suction Lid that does not have the 3" Hose attached, as shown in Figure A. Then, attach the other end of that 23" Hose to the Vacuum Pump (1).
3. Make sure the O-ring (11) is completely seated into the groove on the top of the Cup (3) to provide a good seal. Firmly attach the Suction Lid to the Cup.
4. Remove the cap from the vehicle's master cylinder, and make sure the master cylinder is full of brake fluid. If not full, fill the master cylinder to capacity with clean, new brake fluid. (Use only the kind of brake fluid recommended by the vehicle manufacturer.)
5. Connect the other 23" Hose to the remaining port on the Suction Lid.
6. Insert the appropriate Brake Bleed Screw Adapter (9a, 9b, or 9c) into the 23" Hose.
7. Attach Brake Bleed Screw Adapter to bleed screw on vehicle caliper.
8. Squeeze the Handle of the Vacuum Pump 10 to 15 times to create a vacuum in the Cup.

Note: The Gauge on the Vacuum Pump should read at approximately 10 inHg. Do not exceed 20 inHg. A greater vacuum could damage the vehicle's brake system.

9. Open the vehicle's brake caliper bleed screw, and allow brake fluid to flow into the Cup until fluid appears clear and free of bubbles. Then, retighten the bleed screw.

IMPORTANT: If very small and evenly sized bubbles are coming through, the air is probably coming from within the system. These bubbles do not affect brake operation and need not be eliminated. Placing grease or Teflon tape around the bleed screw threads to act as a seal on the Brake Bleed Screw Adapter will generally eliminate these bubbles.

5. Connect the other 23" Hose to the remaining port on the Suction Lid.

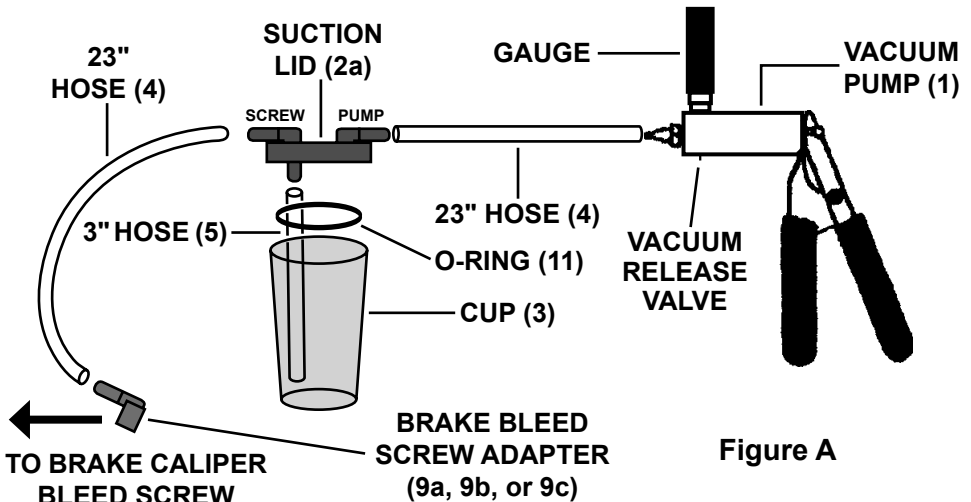


Figure A

10. Release the vacuum in the Vacuum Pump with the Vacuum Release Valve. Then, disconnect the Brake Bleed Screw Adapter from the vehicle's brake caliper bleed screw.
 11. Remove the cap from the vehicle's master cylinder, and refill the master cylinder back to its normal capacity with clean, new brake fluid. Then, replace the cap on the master cylinder.
 12. Proceed to the vehicle's next brake caliper, and perform the same steps as above.
 13. When finished using the Vacuum Pump, clean the tool and store it in a clean, dry location out of reach of children.
 14. **WARNING! TO PREVENT SERIOUS INJURY: Before driving the vehicle, carefully check for leaks and test for proper brake operation.**
- Note:** Do not allow the Cup to fill completely with brake fluid. Keep the Cup as level as possible during use and do not allow fluid to reach the Suction Lid at the top of the Cup. When necessary, release the vacuum in the tool and empty the Cup of old brake fluid. To assist in transport, this set includes a Transport Lid (2b) without hose connections. After the brake fluid is disposed of properly, resume bleeding the brakes.


Maintenance and Servicing

1. **Before each use:** Inspect the general condition of the Vacuum Pump. Check for misalignment or binding of moving parts, cracked or broken parts, damaged Hoses, loose connections, and any other condition that may affect its safe operation. If a problem occurs, have the problem corrected before further use. **Do not use damaged equipment.**
2. **When cleaning:** Do not clean the Vacuum Pump with cleaners or other solvents. Use a clean, dry cloth. Do not immerse the Vacuum Pump in any liquid.
3. **When storing:** Do not store fluid in the Cup. Dispose of excess fluid properly, according to federal, state, and local guidelines. Store the Vacuum Pump in a clean, dry location out of reach of children.
4. **CAUTION! All maintenance, service, or repairs not listed in this manual are only to be attempted by a qualified service technician.**

Parts List and Diagram

Part	Description	Qty
1	Vacuum Pump	1
2a	Suction Lid	1
2b	Transport Lid	1
3	4 oz. Cup	1
4	1/4" x 23" Vacuum Hose	2
5	1/4" x 3" Vacuum Hose	2
6	Tapered Hose Adapter	2

Part	Description	Qty
7	"T" Hose Connector	1
8	Straight Hose Connector	1
9a	Brake Bleed Screw Adapter A	1
9b	Brake Bleed Screw Adapter B	1
9c	Brake Bleed Screw Adapter C	1
10	Universal Cup Adapter	1
11	Cup O-Ring	1

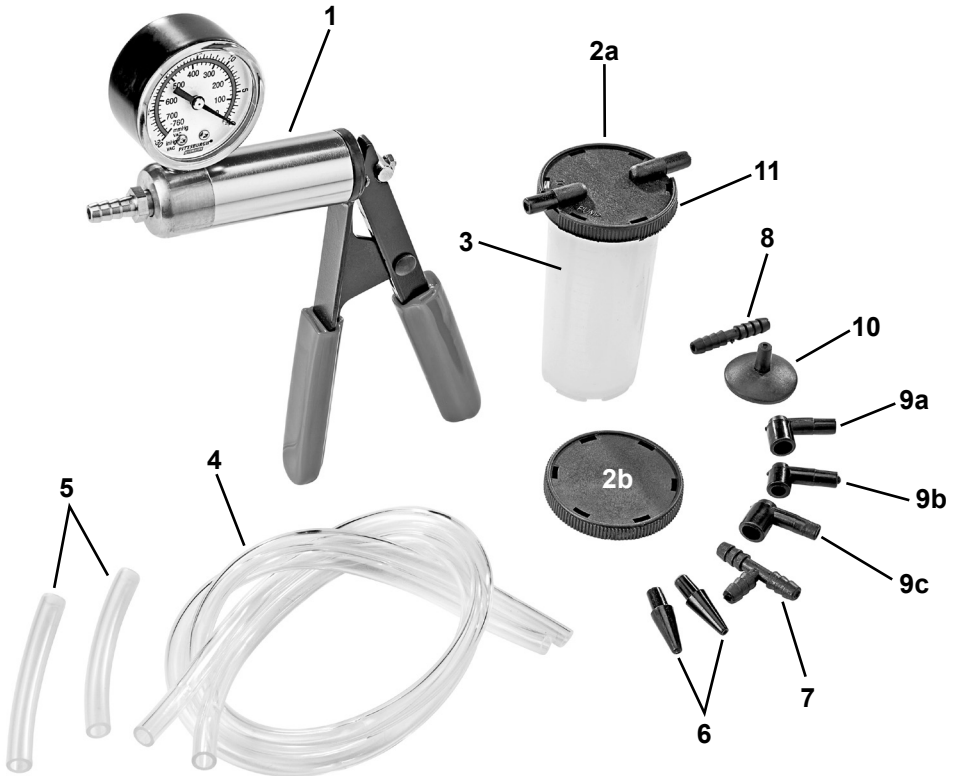

Limited 90 Day Warranty

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly, to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear, or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Record Product's Serial Number Here: _____

Note: If product has no serial number, record month and year of purchase instead.

Note: Some parts are listed and shown for illustration purposes only, and are not available individually as replacement parts. Specify UPC 193175542342 when ordering parts.

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

 **PITTSBURGH**

26677 Agoura Road • Calabasas, CA 91302 • 1-888-866-5797