

IMPACT DRIVER SET SPECIFICATION

ATTACHMENT(6Bits)

1-3/8" Bits- Phillips #3
1-3/8" Bits- Phillips #2
1-3/8" Bits- Slotted 7mm

1-3/8" Bits- Slotted 8mm
2-15/16" Bits- Phillips #3
2-15/16" Bits- Slotted 8mm


INSTRUCTION

APPLICATION

It is for loosening rusted or over tightened screws or nuts that can not be unscrewed by ordinary screwdrivers or spanners. This also can be used for tightening screws or nuts after reversing. It is widely used for assembling and repair of automobiles, cars, ships, buildings, electric apparatus, machinery, etc.

HOW TO USE

Insert a suitable bit into the holder. After striking with hammer on the end surface of handle, the screws or nuts will be loosened or tightened by the way.

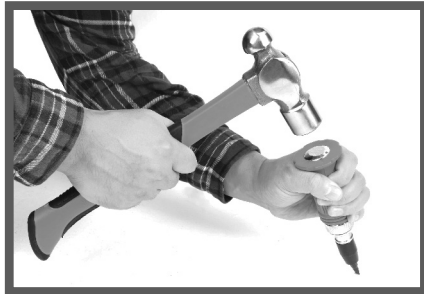

Press the head and turn left or right for reversing.

(1) Adjusting "R" to "L"

(2) Adjusting "L" to "R"

